

Environmental

Operating Conditions	-30° C ~ +60° C (-22° F ~ +140° F) / Less than 95% RH
Storage Conditions	-30° C ~ +60° C (-22° F ~ +140° F) / Less than 95% RH
Ingress Protection	IP67
Vandal Resistance	IK10

Construction



Casing	Metal
Dimensions	Φ109.9mm×81mm (4.33"×3.19")
Net Weight	0.41kg (0.91lb)
Gross Weight	0.53 kg (1.17lb)

Ordering Information

Type	Part Number	Description
6MP camera	DH-IPC-HDBW4631EP-ASE-0360B	6MP IR Mini Dome Network Camera, WDR,PAL
	DH-IPC-HDBW4631EN-ASE-0360B	6MP IR Mini Dome Network Camera, WDR,NTSC
	IPC-HDBW4631EP-ASE-0360B	6MP IR Mini Dome Network Camera, WDR,PAL
	IPC-HDBW4631EN-ASE-0360B	6MP IR Mini Dome Network Camera, WDR,NTSC
	DH-IPC-HDBW4631EP-ASE-0280B	6MP IR Mini Dome Network Camera, WDR,PAL
	DH-IPC-HDBW4631EN-ASE-0280B	6MP IR Mini Dome Network Camera, WDR,NTSC
	IPC-HDBW4631EN-ASE-0280B	6MP IR Mini Dome Network Camera, WDR,PAL
	IPC-HDBW4631EN-ASE-0280B	6MP IR Mini Dome Network Camera, WDR,NTSC
Accessories (optional)	PFB203W	Wall mount
	PFA136	Junction box
	PFA152-E	Pole mount
	LR1002	ePoE Over Coax Converter
	PFA200W	Rain shade

Accessories

Optional:

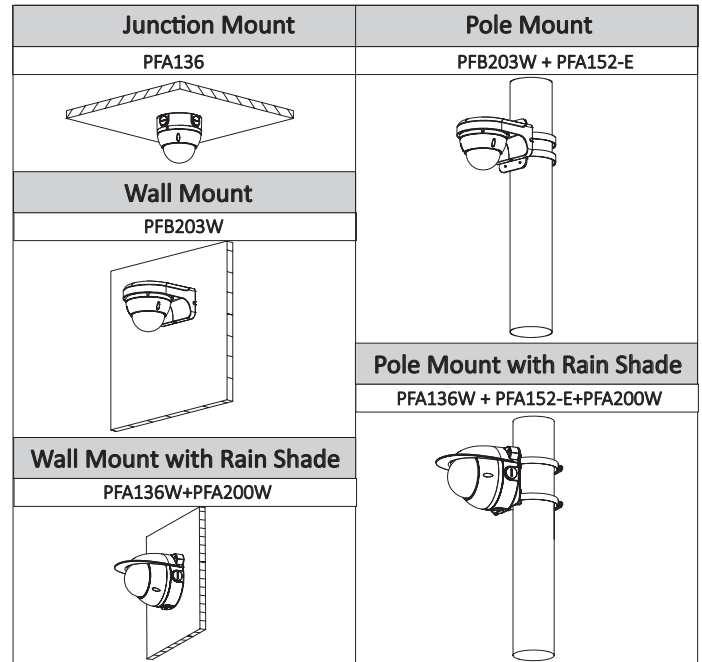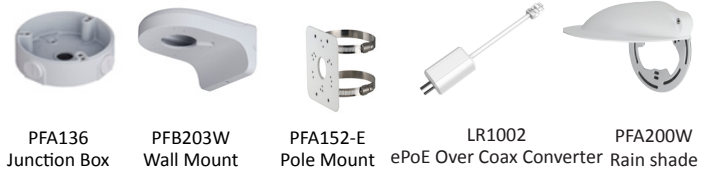

Dimensions (mm/inch)

