


4+2 100Mbps PoE Switch

AI106

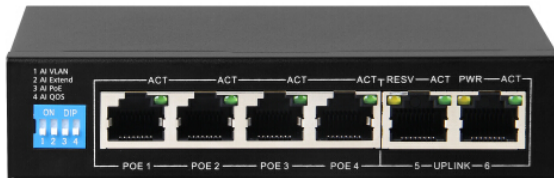

Overview

AI106 is 6 port 100Mbps PoE switch with 4 working modes, AI VLAN mode, AI Extend mode, AI PoE, AI QoS mode. By default, all ports are free to communicate; when AI VLAN mode is enabled, 1-4 ports are isolated from each other, which can effectively suppress network storms and improve network performance. In the AI Extend mode 1-4 ports can effectively transmit distances up to 250 meters, which is suitable for remote monitoring and power supply. In the AI PoE mode, the switch automatically detects the working status of the PD device and finds that the abnormal device automatically restarts the device. In the AI QoS mode, when the device is congested, the video data is processed preferentially to make the video smooth. The device supports the standard IEEE 802.3af/at protocol, which can automatically detect and identify the PDs that comply with the IEEE 802.3af/at standard and provide power for them, so there is no need to worry about PoE or non-PoE devices that can damage private standards.

Main characteristics

- **AI Extend:** 1-4 ports support 250 meters long distance power supply (should be use cat5e or cat6 cable)
- **AI VLAN:** Isolating ports 1-4 to each other can effectively suppress network storms and improve network performance.
- **AI QoS:** Customize application priority to improve network sensitivity. For example, video priority, monitoring transmission is more smooth
- **AI PoE:** Automatically detect the power receiving port, find the dead device, power off and restart the device
- Support wireless access points (APs) and network surveillance cameras via Cat 5 cables;
- Support IEEE802.3af/at standard PD device ;
- Support uplink port auto-flip (Auto MDI/MDIX)

- Adopt store-and-forward exchange mechanism
- Intelligent power supply, lowest power consumption, ensure the power demand of the PD terminal
- Zero configuration feature power is automatically supplied to the adaptive device;
- No fan design to achieve energy saving and environmental protection;

Specification :

Port	· 4 10/100Mbps PoE RJ45 port (Port 1~ port4)
	· 2 10/100Mbps RJ45 port uplink(Port5~port 6)
Transfer Rate	· 100Mbps full Duplex , 10 or 100Mbps Half Duplex
Standard	· IEEE 802.3i、 IEEE 802.3u、 IEEE 802.3x、 IEEE 802.3af、 IEEE 802.3at
Performance	· Bandwidth : 1.2Gbps (no block))
	· Network delay (100 to 100M bps) : maximum 20 μs (using 64 byte packet)
	· Frame filtering and transmission rate:
	10M port maximum 14,800pps ,100M port maximum 148,800pps
	Support 1K MAC address
	Packet forwarding rate:0.89Mpps
LED indicator	· Power
	· LINK/ACT
PoE pin	1/2/4/5(+) , 3/6/7/8(-) ;
Power	· Max power for single port 30W .
	· External power adapter : 60W ;
Dimensions	· Size (LxWxH) : 125mm x 75mm x 27mm
	· Weight : 0.75kg
Input power	· DC 52V
Environment	· Operating Temperature : 0°~40°C
	· Operating Humidity : 10%~ 90% , Non-condensing
Certifications	· CE/FCC

Caution :

1. In order to safety, please non-professionals don't open the casing of product;
2. Please be careful the risk of strong current and security protection when products carry power;
3. Please select the right power adaptor provide power for PoE switch, before using please confirm if is it accord with the requirement of PoE switch;
4. Please don't use PoE switch under the humid environment, avoiding water go into the product inside caused PoE switch breakdown.
5. Please start the power after the circuit connected;
6. Please don't plug-in and plug-out the connection cable when product is carrying on power;
7. Please don't use PoE switch under somewhere with more dust and EME;
8. Please don't put heavy thing on PoE switch, in order to having an accident.;
9. According to the IEEE802.3af/at standard, please use the Cat5 or above, transmission distance 250 m;
10. Please don't exceed the maximum output power of PoE switch when it connect more than one PD device;
11. Suggestion that PoE switch use for indoor, if you want to use for outdoor, Please install waterproof box